



## Concentrate on every lamp

LED Battery flashing light series/**HTD-24-C**/Vibration flashing

Description of products:


HTD-24-C Constituted by: PCB, RGB LED, Battery, Vibration sensor (snap switch) device and perfusion glues.

HTD-24-C LED Battery flashing light **R/G/B** Four cycles stop flashing, the LED color is pure and brightness.



HTD-24-C Battery endurance:

CR1220 7-10 days; CR1632 20-30 days around 600000 times flashing. (1DAY\*24HRS Working time)

HTD-24-C is IP66 waterproof. **\*Main** used for Shoe lights, chest ornaments, beer trays, bars, dance halls and other. Imagine the land within your reach. (Shining clothes lamp, vibrating sole lamp, colorful hat lamp.)

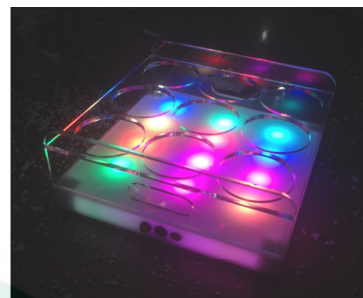

HTD-24-C PIC & SIZE

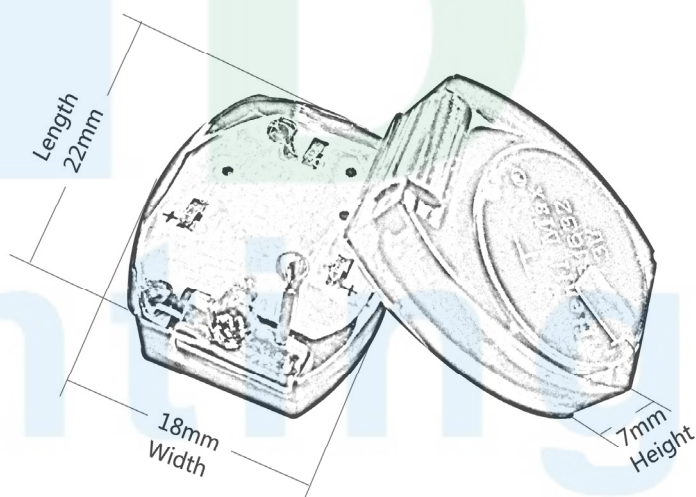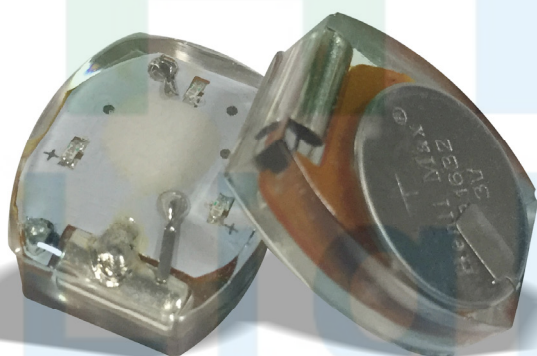

HTD-24-C Module parameters:

Item	Parameters	Units
Working mode	Vibration flashing	*
Vibration flashing mode	<b>R/G/B</b> Four cycles stop flashing	*
working temperature	-40~55	°C
IP grade	IP66	*
Dimensions	L22*W18*H7	mm
Light Source Lifespan (Warranty)	CR1220 7-10 days / CR1632 20-30 days around 600000 times flashing. (1DAY*24HRS Working time)	
Beam Angle	120°	*
Net Weight	4.5g	*
Package (Forecast)	10000pcs/CTN/46kg MEANS: 310mm*280mm*380mm	



**PS: Save a tree. Kindly don't print this document unless it's really necessary.**